



# Apple Wireless Keyboard Logic Board Replacement

This is a guide to replace the logic board of a Apple Wireless Keyboard

Written By: Nicola



## INTRODUCTION

You need a Metal spudger and a screwdriver

---



### TOOLS:

- [Phillips #2 Screwdriver](#) (1)
  - [Metal Spudger](#) (1)
-

## Step 1 — Logic Board



- Insert a metal spudger to open the plastic part under the Keyboard

## Step 2



- Remove the screw




## Step 3



- Pull the lock up and disconnect the connection cable

## Step 4

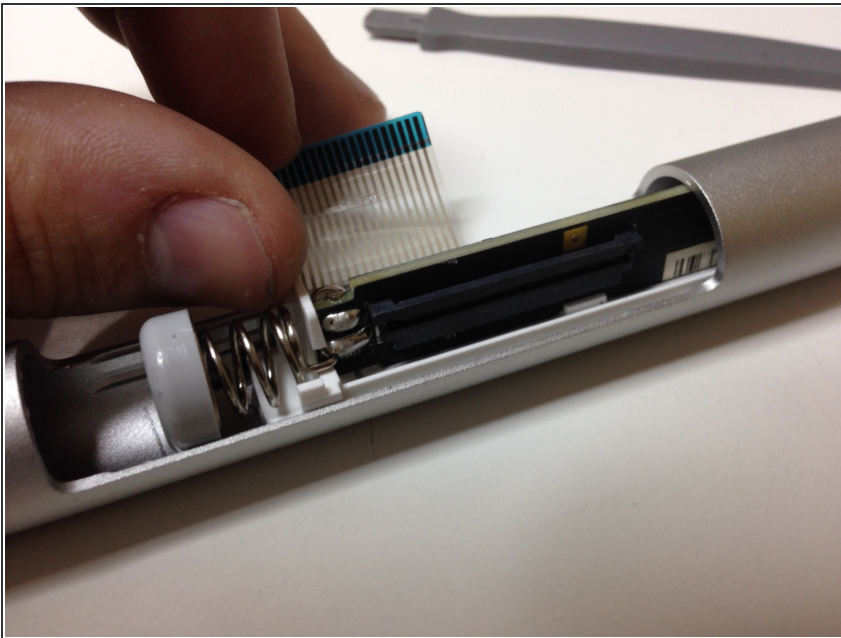


- Keeping the connection cable, push out the logic board's placement

## Step 5



- Unlock the latch of the logic board

## Step 6

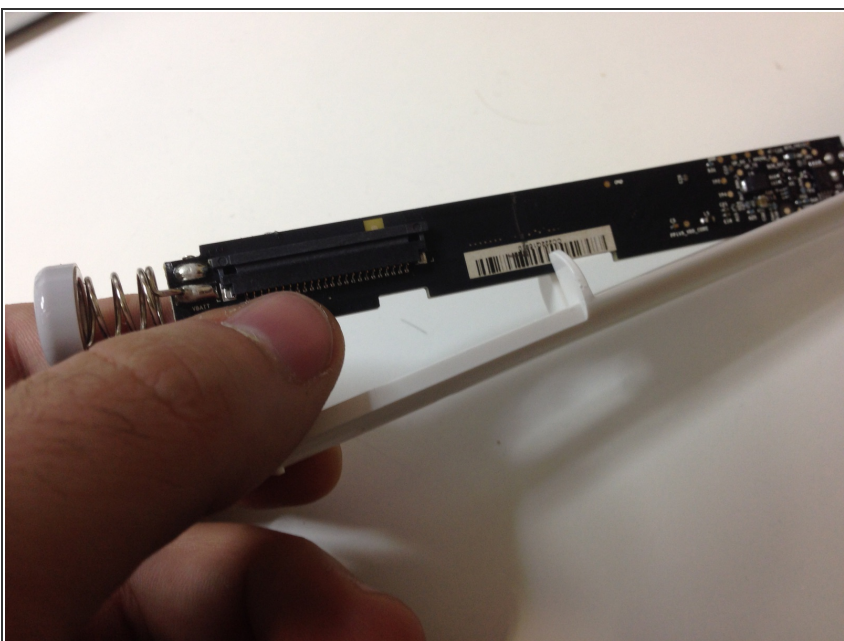

- Remove the logic board from the placement

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-21 06:52:29 PM.